


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 30 TOWNSHIP 17 RANGE 5
DATE: 1-25-2000 9-26-06
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-29-82

IN. S.P.C. E ZONE, NAD 83
NAME: 17053002
N: 516251.9130(m)
E: 71103.3760(m)

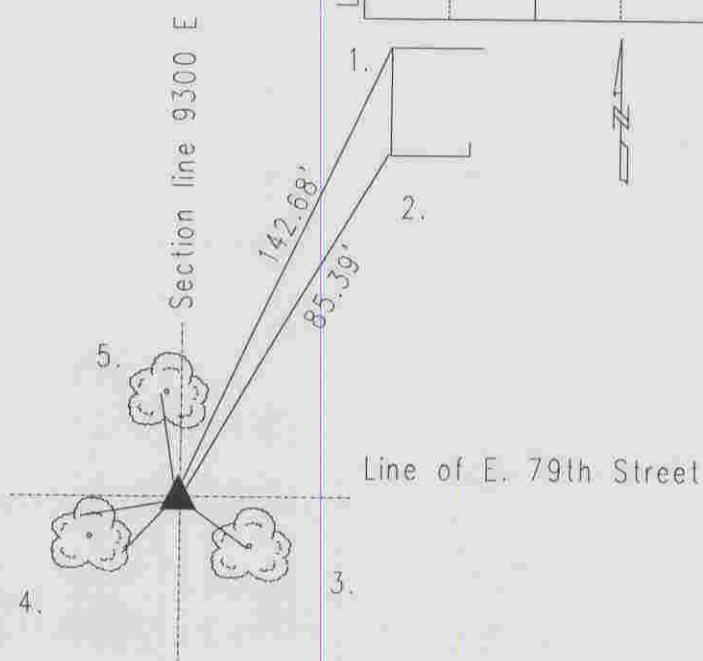

Original post set 1821 by Loughlin with witnesses: 8" Beech N 27 W 28 links, 10" beech S 48 E 35 links. Legal Survey performed 8-1854 by Alexander Wilson per Lawrence Township Legal Survey Book pg. 9 labels corner "B" and calls it a stone. One witness was taken and distances are given to corners E, N and W of the corner. 3-28-79 ties by Bruer indicate that an exposed stone was found at the corner in agreement with plat of Sargent Hills Addition. 79 ties redrawn in 3-5-82. Plats of survey of P.J. Cripe Inc. Job#79110 and Job#80200 indicate a stone found per County Surveyor references at the NW corner of the NE quarter of 30-17-5. This corner position was excavated on July 29, 1982 by Cleveland. The stone +/- 75 pounds and 18"x12"x8" was removed and a Harrison was set. Re-tied 1-25-2000 by Kiste.

HC 753002

REF.	DISTANCE	DESCRIPTION
1.	142.68'	NW corner of #7902 Windhill Drive brick bldg
2.	85.39'	SW corner "
3.	10.99'	Mag nail w/washer S spur root 18" walnut
4.	8.36'	Mag nail w/washer SE 60" twin oak 12"up
5.	7.88'	Mag nail w/washer N 60" twin oak 24"up
6.	3.64'	Mag nail w/washer W 3" elm 4"up